



Economy Series

Elevation View

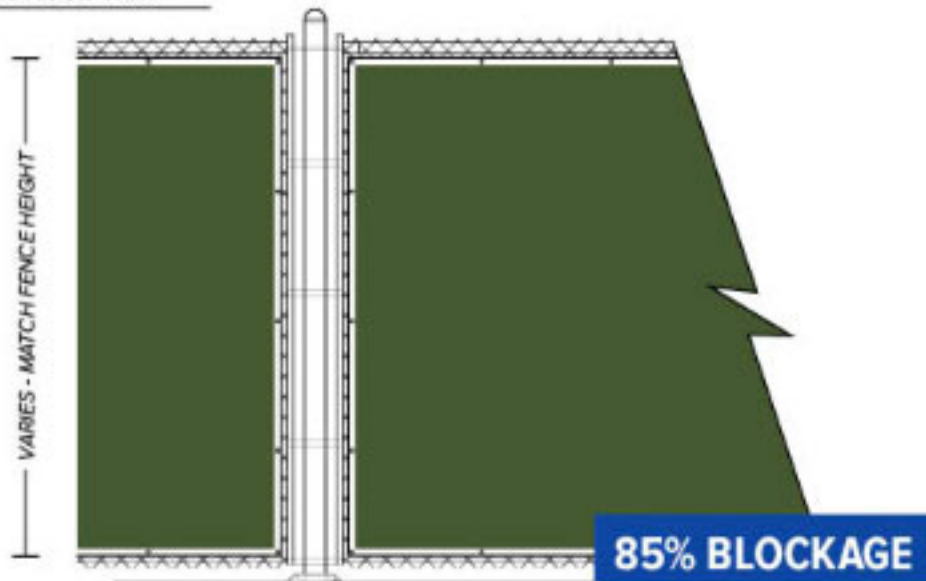

FENCESCREEN PANELS WITH 2" POLYPROPYLENE WEBBING FOR EDGE REINFORCEMENT. 3/8" BRASS GROMMETS AT 24" ON CENTER ATTACH TO FENCE WITH FENCESCREEN FASTENERS OR GALVANIZED HOG RINGS.

Attachment Enlargement

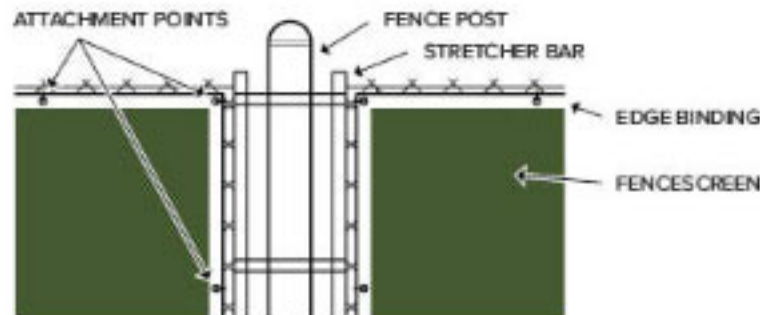

NOTE:
 • INSTALL PER FENCESCREEN MANUFACTURER RECOMMENDATIONS.
 • REFER TO STRUCTURAL PLANS FOR ALL FOOTING SIZES.

FENCESCREEN PROPERTIES

PROPERTIES	TEST METHOD	RESULTS
Weight	ASTM D-3776	135 g/m ²
Material Break Strength		420 lbs/ft
Crystalline Melt Point		133°C
Flamability Point		364°C
Shade Percentage		85%

MATERIAL COMPOSITION

Enviro Privacy Screen is made from knitted high density polyethylene (HDPE) with no fillers.

DURABILITY

HDPE Fence Products are resistant to: severe weather conditions, salt water, sand, road dirt, most acids, alcohol, alkaline, ammonia, petroleum distillates and common environmental pollutants.

MAINTENANCE

Pressure cleaning of surface contaminants is quickly accomplished with plain water.

WIND LOAD DISCLAIMER

Fencescreen will not be responsible for fence damage resulting from wind load conditions due to insufficient structural support.

FEATURES

- UV stabilized to protect against the harmful rays of the sun.
- Available in any custom size.
- 2-3 year product lifespan
- 90 day limited warranty

Available Colors

Green, Black



Available Heights

6'

Drawings not to scale.

Printer's Cove

305-563-9948 - www.FenceBannerPrinting.com